


# CABLE-WAITER

## RESIDENTIAL DUMBWAITER

SERIES 007

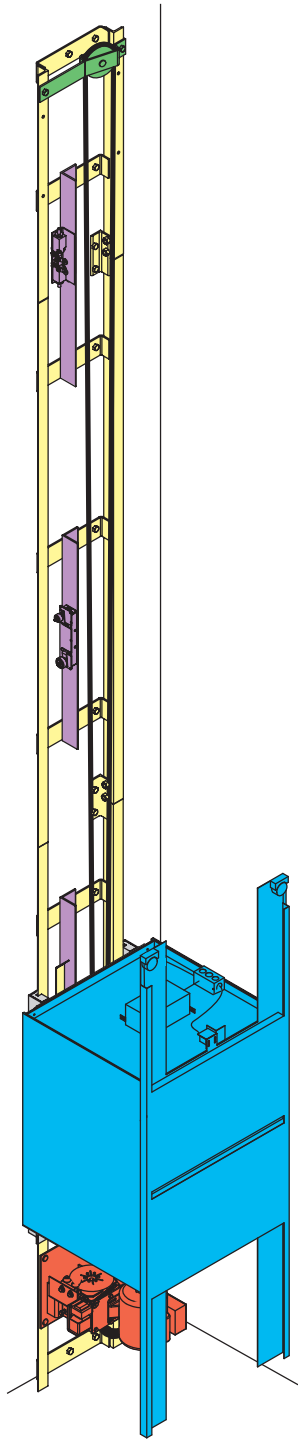

**CAPACITY** - 100 LB.

**TRAVEL** - up to 50 ft.

**STOPS** - up to 6 stops.

**NOMINAL SPEED** - 30 feet per minute

**OVERHEAD** - 8" minimum, 1'-6" recommended above top of car (additional overhead required for car gates or overhead machine configurations.).

**LOADING HEIGHT** - 30" minimum when machine is "rail mounted" below car (overhead or remote machine location and/or pit, required for loading heights below 30").

**GUIDE RAILS** - heavy gauge steel angles.

**ELECTRIC SUPPLY** - 115 volts, single phase.

**POWERHEAD** - single speed winding drum with 3/4 HP motor.

**BRAKE** - electromagnetic disc brake, electrically released and spring applied.

**CONTROLS** - momentary contact call/send push buttons at each landing.

**SAFETIES** - single instantaneous broken cable, applied by a retained compression spring.

**CABLE** - 1/8" diameter steel cable.

**HOISTWAY DOOR INTERLOCKS** - required at each landing.

**CAR GATE OPTIONS** - Roll Top (standard), Bi-Parting

